



Introduction

The 26-port Gigabit intelligent Ethernet switch adopts high-quality and high-speed network ICs, and this product completely solves the problem of noise of small switches in the office environment through the fanless mute design. This switch has 24 Gigabit RJ45 ports and 2 1000M SFP ports, can provide seamless connection for 10/100/1000M Ethernet, supports three working modes, one-key smart simple switching working mode, easy to manage and maintain, the product can be widely used in Security network video surveillance, hotel, campus, small and medium-sized enterprise network engineering and other occasions.

Main Features

- ❖ 24*10/100/1000M RJ45 Ports+2*1000M SFP Ports
- ❖ Comply with IEEE 802.3, IEEE 802.3u, IEEE802.3ab, IEEE802.3z standards
- ❖ Ethernet port 10/100/1000M rate auto adaptive
- ❖ Flow control mode: full-duplex adopts IEEE 802.3x standard, half-duplex adopts Back pressure standard
- ❖ Support Port Auto-flip (Auto MDI/MDIX)
- ❖ Panel indicators to monitor working status and help fault analysis
- ❖ One-key smart switch, supports VLAN, Default, Extend
- ❖ Port 1-8 supports Qos data priority

Application Environment

- ❖ Metro Optical Broadband Network: Data network operators such as telecommunications, cable TV, and network system integration, etc.
- ❖ Broadband private network: Suitable for financial, government, oil, railway, electric power, public security, transportation, education and other industries
- ❖ Multimedia transmission: Integrated transmission of images, voice and data, suitable for remote teaching, conference TV, videophone and other applications
- ❖ Real-time monitoring: Simultaneous transmission of real-time control signals, images and data

Specifications

I/O Interface	
Power	Input: AC 100-240V, 50/60Hz
Ethernet	24*10/100/1000Mbps RJ45 Ports 2*1000M SFP Ports
Performance	
Switching Capacity	52Gbps
Throughput	38.68Mpps
Packet Buffer	4Mbit
MAC Address	8K
Jumbo Frame	9.6Kbytes
Transfer Mode	Store and forward
MTBF	100000 hour
Standard	
Network protocol	IEEE802.3 (10Base-T) IEEE802.3u (100Base-TX) IEEE802.3ab(1000Base-TX) IEEE802.3z(1000Base-FX) IEEE802.3x (Flow control)
Industry Standard	EMI: FCC Part 15 CISPR (EN55032) class A EMS: EN61000-4-2 (ESD) EN61000-4-4 (EFT) EN61000-4-5 (Surge)
Network Medium	10Base-T : Cat3、 4、 5 or above UTP(≤100m) 100Base-TX : Cat5 or above UTP(≤100m) 1000Base-TX : Cat5 or above UTP(≤100m)
Optical Media	Multimode fiber : 50/125, 62.5/125, 100/140μm Single mode fiber: 8/125, 8.7/125, 9/125, 10/125μm
Protection	
Security Certificate	CE、 FCC、 RoHS
Environment	
Working Environment	Working Temperature : -20~50°C Storage Temperature : -40~80°C Working Humidity : 10%~90% , non-condensing Storage Humidity : 5%~90% , non-condensing

Shenzhen GZCOM Communication Co., Ltd.

Email: sales@gzcomm.com
<https://www.gzcomm.com>

Ethernet Switch (GZM-1000-2F24R)
10/100/1000Mbps Commercial Unmanaged Ethernet Switch
16 RJ45 Port, Integral Power supply




	Working Height : Maximum10,000 feet Storage heigh : Maximum 10,000 feet
Indication	
PWR (power supply)	Lighting : Powered Un-Light : No Power
Link/Act(1-26)	Lighting : Connecting Flashing : Data Transmit Un-Light : Disconnect
1000M(1-26)	Lighting : 1000M Link Connecting Un-Light : 10/100M Link Connecting or Disconnect
DIP Switch	VLAN : Port Isolation, 1-24 ports are isolated each other, all communicate with uplink port 25/26; Default : Default mode, all port can communicate with each other; Extend : Link extension mode, 9-24 ports supply data transmission distance can be extended to 250 meters, the transmission rate becomes 10M
Mechanical	
Structure Size	Product Dimension (L*W*H): 440*204*44mm Package Dimension (L*W*H): 500*290*85mm N.W : 2.2kg G.W : 2.7kg
Packing Info	Carton MEAS : 520*445*300mm Packing Qty : 5 units Packing Weight : 14.5KG
Power Voltage	Input Voltage : AC 100-240 V Power supply : 12V2A
Package List	Switch 1 pcs, Power cord 1 pcs, User manual 1 pc, Certification 1 pc, Brackets 1 pair
Ordering Info	
GZM-1000-2F24R	26-Port Gigabit Ethernet Switch

Structure

Shenzhen GZCOM Communication Co., Ltd.

Email: sales@gzcomm.com
<https://www.gzcomm.com>

**Ethernet Switch (GZM-1000-2F24R)
10/100/1000Mbps Commercial Unmanaged Ethernet Switch
16 RJ45 Port, Integral Power supply**

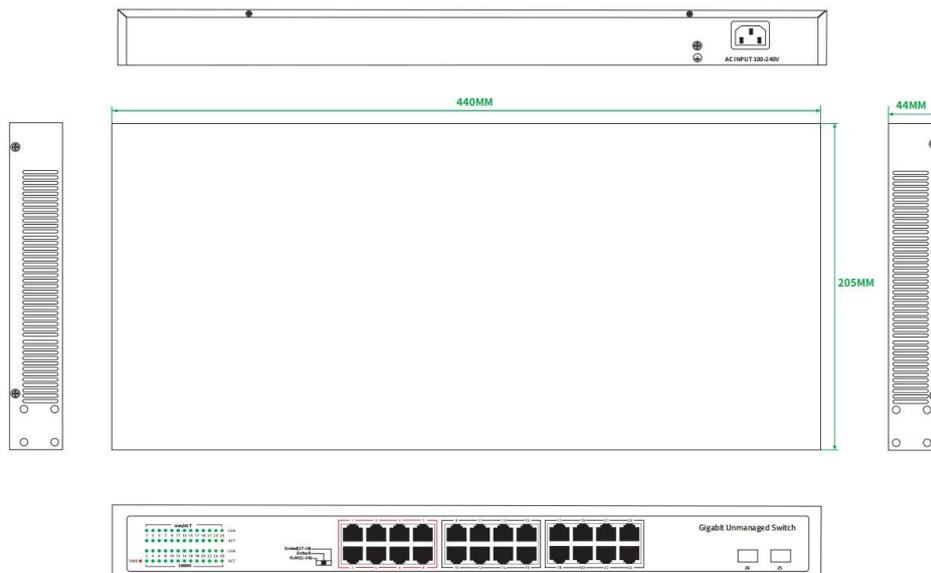

GZCOM reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by Shenzhen GZ Communication Co., Ltd.

Copyright ©GZCOM

All Rights Reserved

Shenzhen GZCOM Communication Co., Ltd.

Email: sales@gzcomm.com
<https://www.gzcomm.com>