



## **Product Description**

GZ-AP240 is an 11ac Wi-Fi standard high power Ceiling Wireless Access Point with MTK chipset , combined 1200Mbps Wi-Fi speed over 2.4GHz(300Mbps) and 5GHz(900Mbps), make more than 80 end users can access into it. It is an economic option for hotel, school, restaurant or other enterprise place.

### **FIT/FAT Operation Mode**

GZ-AP240 support FIT/FAT operation mode; If FIT AP, work with AC controller, plug and play, central management by AC controller, mostly for enterprise application. If FAT AP, support AP, repeater, gateway, WISP operation mode, can be configured by GUI, suit for home mostly.

### **Multiple Protection for Stable Performance**

GZ-AP240 with ABS fireproof material, white color, suite for various decoration styles. Besides that, PCB board with watchdog design, can reboot automatically in case of failure. What's more, it support lightning protection and ESD protection, can install in various harsh environment.

### **Power over Ethernet**

GZ-AP240 has integrated IEEE802.3af Power over Ethernet (PoE), for easy installation and lower cost. So it can be installed in areas where power outlets are not readily available, eliminating the mess of altering existing network infrastructure.

### **Zero Configure & Cloud Management System**

Support FIT/FAT AP together, work with GZCOM WLAN Controller, zero configure in IP address, ESSID, Channel, Password, upgrade firmware, backup and restore.... Besides that, it support advertisement and authentication functions like WeChat/Google/SMS/Facebook/Member Authentication.

# 11ac1200Mbps Wi-Fi standard high power Ceiling Wireless Access Point,wifi AP(GZ-AP240)



Then the WLAN controller can access into Cloud Management System, easy to make administrator access it, to do remote monitoring/management at any time and any place, make this AP and WLAN controller more professional and cost saved in Wi-Fi Projects.

## Features

- ❖ Comply with IEEE 802.11ac/b/g/n, dual band, 1200Mbps Data Rate, 11ac 2x2 MIMO Technology
- ❖ 2\*10/100Mbps Ethernet Ports to meet with different customer' s request.
- ❖ Support active IEEE 802.3af 48V PoE standard
- ❖ Support SSID broadcasting, Multi SSID up to 8 (4 SSID in 2.4GHz, 4 SSID in 5GHz)
- ❖ Support Gateway (PPPOE, static IP, dynamicIP) , Wireless AP, Repeater, WISP operation mode in FAT AP
- ❖ With function of build in firewall, IP filter, URL filter and MAC filter
- ❖ Comply with IEEE 802.3az standard, RF power adjustment and frequency analyzer for better application in different environment

## Product Spec.

<b>Hardware:</b>	
Chipset	MT7628DAN+MT7613BEN
Standard	802.11ac/b/g/n, MIMO technology
Memory	64MB
Flash	SPI NOR 8MB
Interface	1 * 10/100Mbps RJ45 WAN Port
	1 * 10/100Mbps RJ45 LAN Port
	1 * Reset button, press 15 seconds to revert to default setting
Antenna	Build in 5dBi 2.4GHz MIMO Antenna Build in 4dBi 5.8GHz MIMO Antenna
Size	188*33mm
POE	48V 0.5A
DC	12V 1A
LED Indicator	Sys, 2.4G WIF, 5.8G WIFI, LAN, WAN
Max Power Consumption	< 10W
ESD	±6KV
Surge Protection	Different mode: ±2KV
<b>RF Data</b>	
Frequency	2.4G:802.11b/g/n: 2.4GHz~2484GHz
	5GHz:802.11a/n/ac: 5150MHz ~5850MHz
Country code	FCC、IC、ETSI、MKK、MKK1、MKK2、MKK3、NCC、RUSSIAN、CN
Modulation	OFDM = BPSK,QPSK, 16-QAM, 64-QAM, 128-QAM, 256-QAM

**Shenzhen GZCOM Communication Co., Ltd.**

# 11ac1200Mbps Wi-Fi standard high power Ceiling Wireless Access Point,wifi AP(GZ-AP240)



	DSSS = DBPSK, DQPSK, CCK
Throughput	1200Mbps
RF Power (2.4GHz)	<22dBm
RF Power (5GHz)	<21dBm
PPM	±20ppm
Max Users	128+
<b>Others:</b>	
Package Contents	1200Mbps Dual Band wireless access point Ethernet Cable Quick Installation Guide Setting Accessory
Environment	Operating Temperature: -20~55 °C Storage Temperature: -40~70 °C Humidity: 5%~95% non-condensing; Storage Humidity: 5%~90% non-condensing
Management	Firmware GUI , Remote Management, WLAN Controller, Cloud Management System


<b>Firmware Features:</b>	
Operation mode Wireless AP: Plug and Play. Gateway: Dynamic IP/Static IP/PPPoE	
Wireless Functions	Multiple SSID functions: 2.4GHz: 4; 5.8GHz: 4
	Support SSID hidden
	Support SSID broadcast
	Support 5G Prior for a faster Ethernet.
	Wireless Security: OPEN, WPA, WPA2, WPA-PSK, WPA2-PSK
	Support MAC filter
	Support Wi-Fi time on/off to save energy
	Support client isolation to improve the wireless stability
	Support RF power adjustable, adjust the RF power based on environment.
	Short GI Enable and Disable
Support user quantity limited, Max 128 users to access each band.	
Networking Function	VLAN settings
	Cloud access support in gateway mode
Device Management	Back-up the configuration
	Restore the configuration
	Reset to factory default
	Reboot the device: including time reboot or reboot immediately
	Admin management password modify
	Firmware upgrade

# 11ac1200Mbps Wi-Fi standard high power Ceiling Wireless Access Point,wifi AP(GZ-AP240)



	System log
	Support firmware GUI web management, AC controller management, remote management and cloud management
Protocols	IPv4


## Product picture

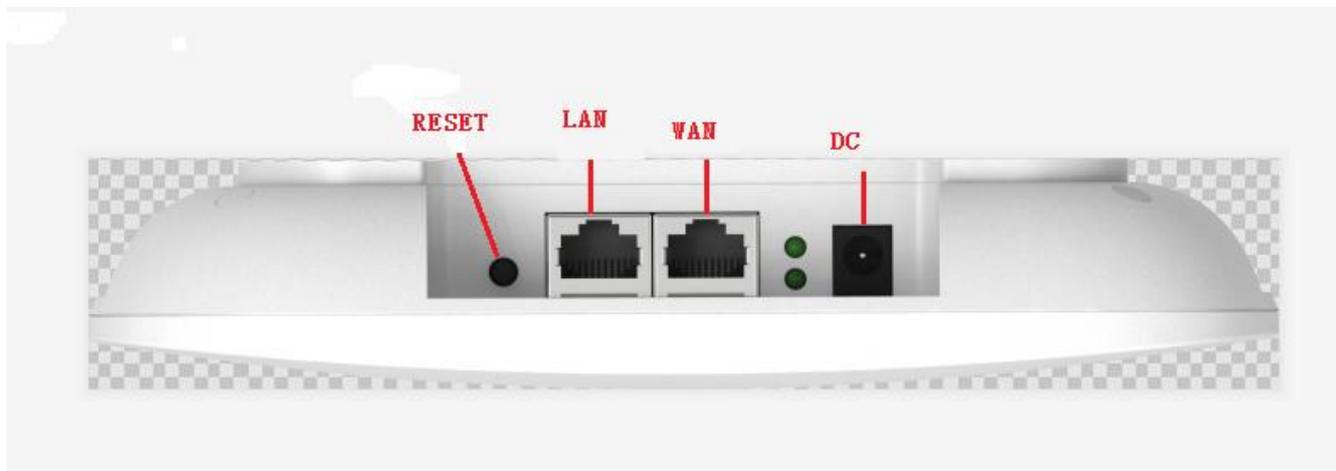

## Application



## Product Picture

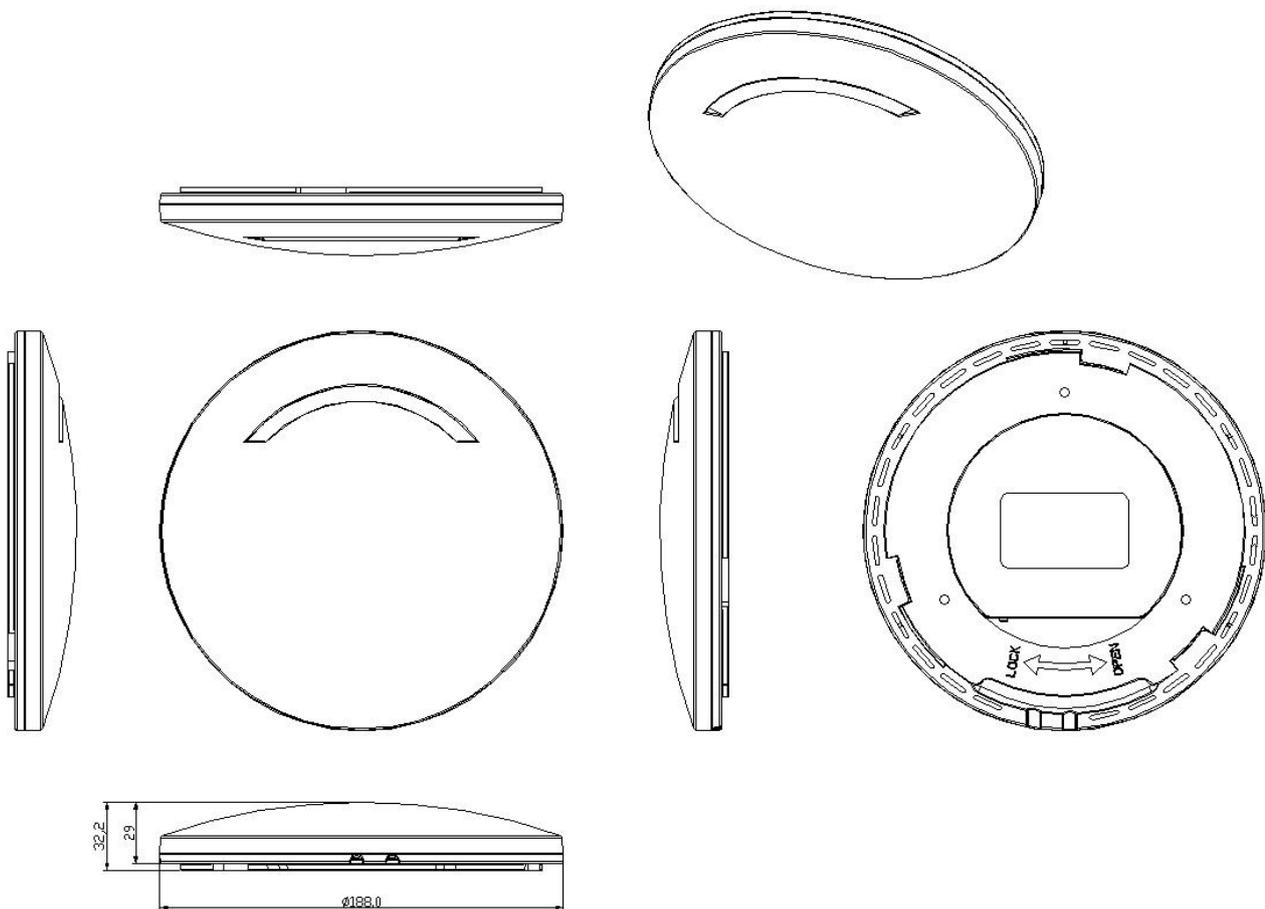

## Accessory

AP	1
Lan cable	1
Mounting Accessories	1
Gift Box	1


Product Sticker:

**1200Mbps Ceiling Wireless AP**

Model:  
POE IN:48V  $\overline{\text{---}}$  0.5A  
DC IN:12V  $\overline{\text{---}}$  1A  
IP:192.168.188.253  
Password:admin  
Made in China





Packing Box

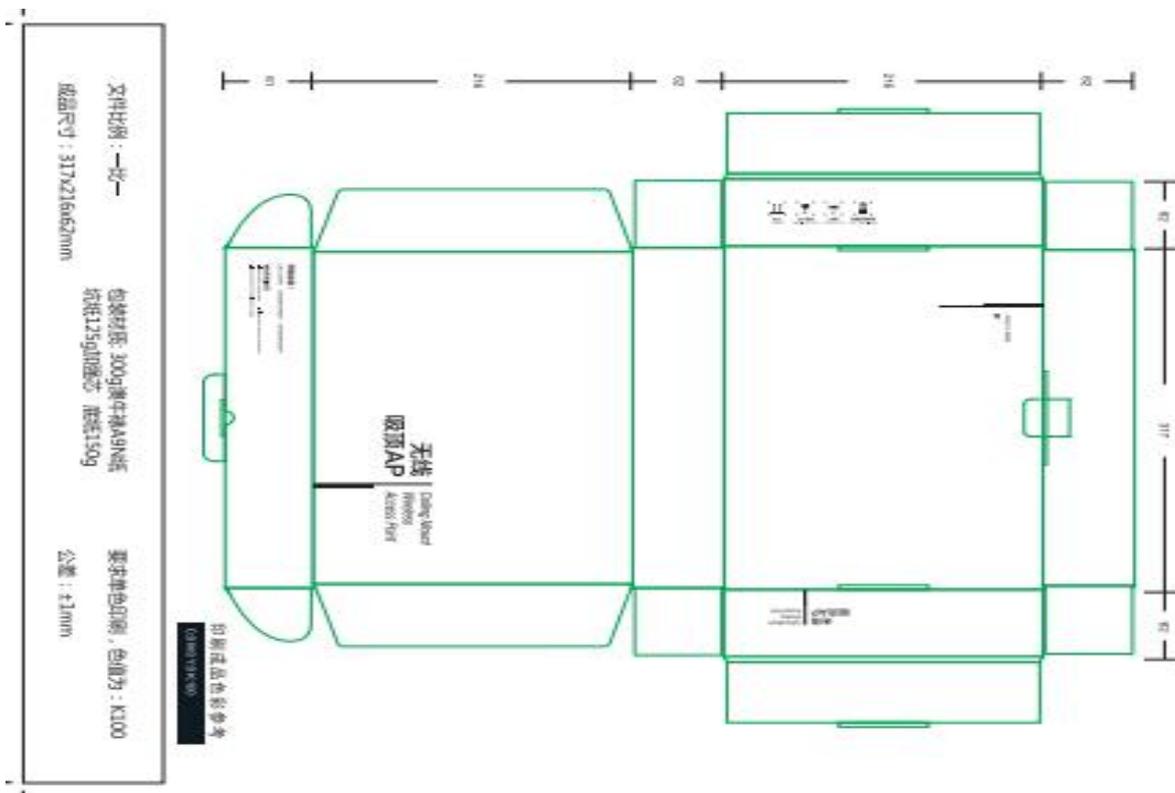

Carton box

# 11ac1200Mbps Wi-Fi standard high power Ceiling Wireless Access Point,wifi AP(GZ-AP240)

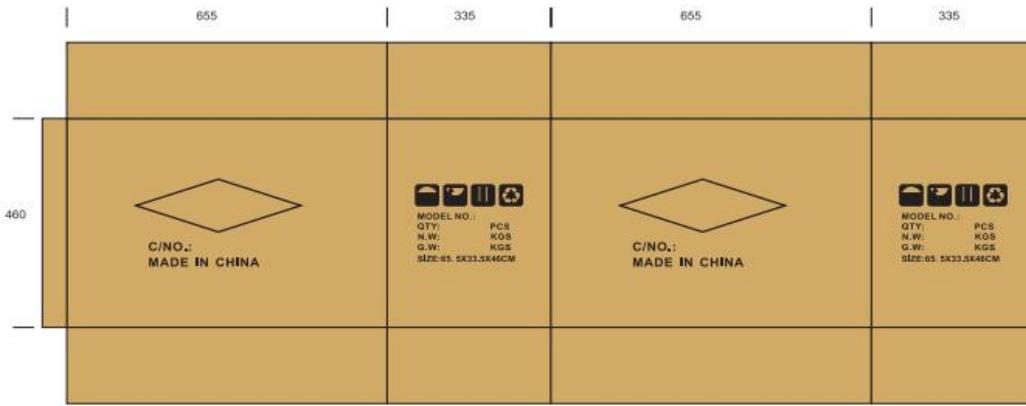

彩盒放置示意图

卡通箱尺寸：65.5X33.5X46CM

料号：BC-KTWX-078

内装彩盒尺寸：32.5x22x6.35cm/每箱20PCS

对应产品型号：XD9341

内尺寸：63.5X32.5X44CM

GZCOM reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by Shenzhen GZCOM Communication Co., Ltd.

Copyright ©GZCOM

All Rights Reserved

**Shenzhen GZCOM Communication Co., Ltd.**