



Product Description

GZ-FAP660 is a high performance, high speed indoor 11n Wall mount AP, can provide 2.4G wireless service, wireless access is more stable.

Main Features

- ❖ 2.4GHz (300Mbps) for maximum wireless throughput
- ❖ Support watchdog function, abnormal device recovery automatically, maintenance-free
- ❖ The heat sink is treated with special coating on the surface, and the heat dissipation effect is more ideal
- ❖ Support 48V PoE

Product Spec.








HARDWARE FEATURES	
Chipset	MT7628DAN+MT7613BEN
Flash	8M Flash
DDR	64M DDR
Interface	1*10/100Mbps WAN port 1*10/100Mbps LAN ports 1*WiFi Switch On/Off button 1*Reset button
Power Supply	48V PoE, IEEE 802.3af standard
Maxi power consumption	< 6W
Dimensions (W X D X H)	87*86*35.8mm
Antenna Type	On board WiFi antenna 2.4G: 3dBi omni antenna

300Mbps 2.4G Wall Mount Wireless AP(GZ-FAP660)



WIRELESS FEATURES							
Wireless Standards	IEEE 802.11n/g/b 2.4GHz						
Frequency	2.4GHz - 2.484GHz						
Signal Rate	Up to 300Mbps						
RF Power (2.4GHz)	802.11b	11M	17±2dBm	1M	19±2dBm		
	802.11g	54M	16±2dBm	6M	18±2dBm		
	802.11n HT20	MCS7	15±2dBm	MCS0	17±2dBm		
	802.11n HT40	MCS7	14±2dBm	MCS0	16±2dBm		
Receive Sensitivity (2.4GHz)	802.11b		11M	-82dBm	1M	-94dBm	
	802.11g		54M	-72dBm	6M	-90dBm	
	802.11n HT20		MCS7	-70dBm	MCS0	-88dBm	
	802.11n HT40		MCS7	-68dBm	MCS0	-86dBm	
Wireless	Auto-Channel selection						
	Distance Control (802.1x Ack timeout)						
	Multiple SSID up to 4						
	BSSID						
EVM	2.4G: 802.11b: ≤-10 dB; 802.11g: ≤-25dB; 802.11n: ≤-28 dB						
PPM	±20ppm						
Max Access Users	64						
Operation Mode	Wireless AP, Gateway, Wi-Fi Repeater						
Wireless Security	64/128-bit WPA / WPA2, WPA-PSK/ WPA2-PSK encryption and RADIUS 802.1x						
ESD - I	Air discharge:±4KV						
Surge-I	Common-mode±2KV						
LED Status	SYS						
Management							
System Settings	Web-based configuration / Software AC controller and Hardware AC controller management						
Firmware Upgrade	Upgrade firmware via web browser or AC controller						
Administration	Admin Password can be configured						
System monitoring	Watch dog, Status in hand , useful statistic and Event log						
Logs	Supports local logs, logs host, logs file export						
Reset	Reset or factory defaults						
Backup	Restore settings & configuration of the device to local file, Scheduled reboot						


Case Design

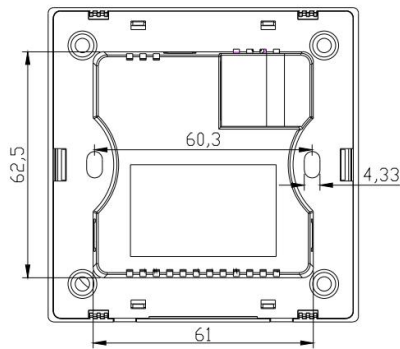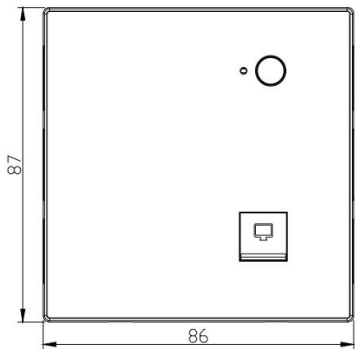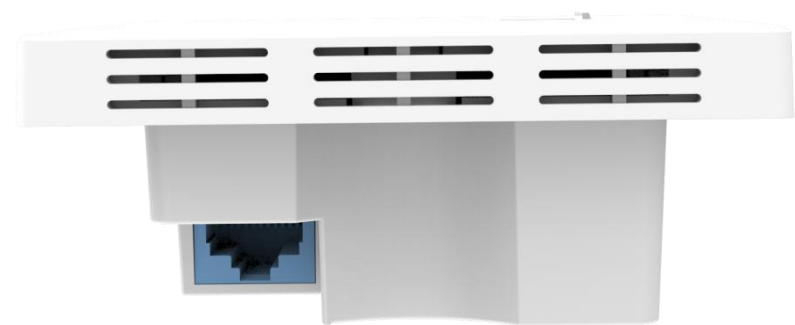


Accessory

AP	1
Screw	2
Gift Box	1

Application For Home

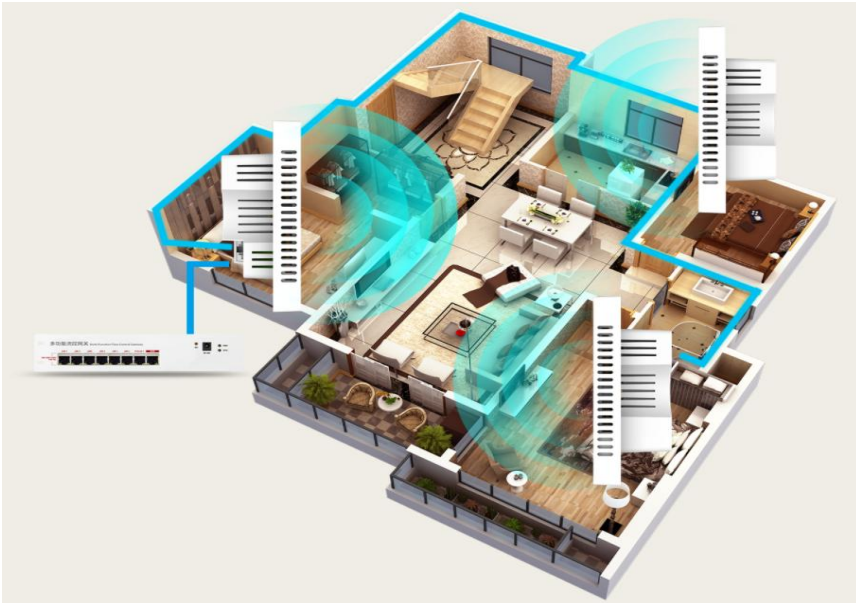

For Hotel/School

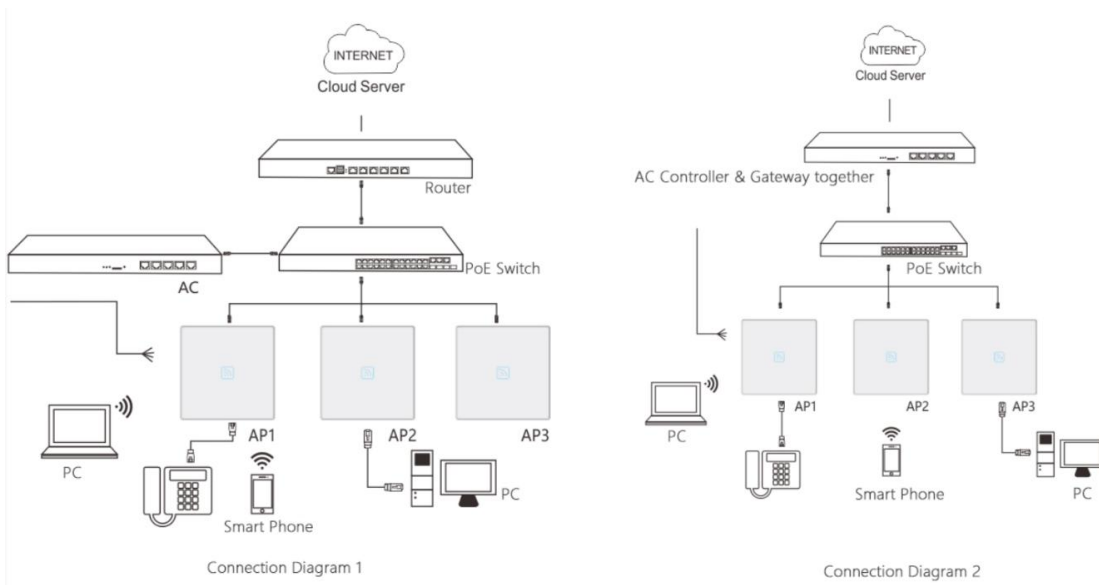

GZCOM reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by Shenzhen GZCOM Communication Co., Ltd.

Copyright ©GZCOM

All Rights Reserved