

PRODUCT CATALOG



A COMPANY PROFILE



Shenzhen GZCOM Communication Co., Ltd specializes in the development, production and sales of optical communications products.

With the development of the optical communication industry and years of rich experience, GZCOM can provide full range of optical products and solutions, the products are widely used in the MAN, LAN, Fiber Channel network, Data Center, FTTx and other fields. Our customers are covered in domestic China , Western Europe, North America, southeast Asia, the commonwealth of independent states (cis), Africa, Middle East, South America and other overseas areas.



Contents

100G QSFP28 Transceiver

100G QSFP28

100G CFP2

40G QSFP+ Transceiver

40G QSFP+ Dual Fiber

40G QSFP+ Single Fiber

25G SFP28 Transceiver

25G SFP28 Dual Fiber

25G SFP28 Single Fiber

25G SFP28 BIDI

25G CWDM/DWDM

10G SFP+/XFP Transceiver

10G SFP+/XFP Single Fiber 10G
SFP+/XFP Dual Fiber

10G SFP+/XFP CWDM/DWDM

10G SFP+ Copper

SFP Module

2.5G SFP Single Fiber

2.5G SFP Dual Fiber

1.25G SFP Single Fiber

1.25G SFP Dual Fiber

155M SFP Single Fiber

155M SFP Dual Fiber

SFP Copper Transceiver

Media Converter

10/100M Dual Fiber

10/100M Single Fiber

1000M Dual Fiber

1000M Single Fiber

10/100/1000M Dual Fiber

10/100/1000M Single Fiber

SFP Media Converter

Active Optical Cable

100G QSFP28 AOC Cable

40G QSFP+ AOC Cable

25G SFP28 AOC Cable

10G SFP+ AOC Cable

Direct Attach Cable

100G QSFP28 DAC Cable

25G SFP28 DAC Cable


40G QSFP+ DAC Cable

10G SFP+ DAC Cable

PRODUCT CATALOG




100G QSFP28 Transceiver

	<p>Features</p> <ul style="list-style-type: none"> ❖ Up to 27.952 Gbps Data rate per channel ❖ Digital diagnostic SFF-8436 compliant ❖ Electrically hot-pluggable ❖ Compliant with QSFP28 MSA ❖ Case operating temperature range:0°C to 70°C ❖ RoHS Compliant
---	--

Ordering Information

PN No.	Data Rates	Package	Wavelength(nm)	Reach	Interface	Source
GZQ10X-C01	100Gbs	QSFP28 SR4	850	100M	MPO	VCSEL+PIN
GZQ10X-C2	100Gbs	QSFP28 CLR4	1264.5-1337.5	2KM	LC	DFB+PIN
GZQ10X-C2	100Gbs	QSFP28 PSM4	1295-1325	2KM	MPO	DFB+PIN
GZQ10X-C10	100Gbs	QSFP28 LR4	1295-1310	10KM	LC	DML+PIN
GZQ10X-C30	100Gbs	QSFP28 ER4	1295-1310	30KM	LC	EML+PIN
GZQ10X-C40	100Gbs	QSFP28 ER4	1295-1310	40KM	LC	EML+PIN

Solution 1

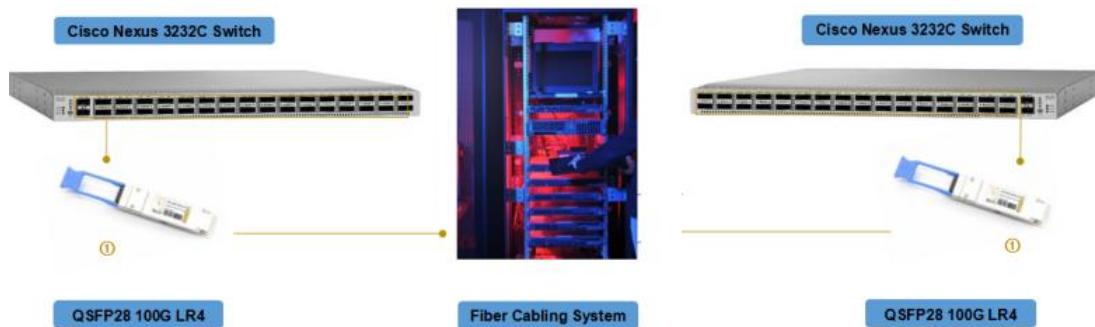

Item No.	GZCOM PN	Description
①	GZQ10X-C10	100G QSFP28 1295-1310nm 10KM LC

PRODUCT CATALOG




40G QSFP+ Transceiver

	<p>Features</p> <ul style="list-style-type: none"> ❖ Up to 11.1Gbps Data rate per channel ❖ Digital diagnostic SFF-8436 compliant ❖ Electrically hot-pluggable ❖ Compliant with QSFP28 MSA ❖ Case operating temperature range:0°C to 70°C ❖ RoHS Compliant
--	---

Ordering Information

PN No.	Data Rates	Package	Wavelength(nm)	Reach	Interface	Source
GZQ4X-C01	40Gbs	QSFP+ SR4	850	100M	MPO	VCSEL+PIN
GZQ4X-C03	40Gbs	QSFP+ ESR4	850	300M	MPO	VCSEL+PIN
GZQ4X-C2	40Gbs	QSFP+ PSM4	1270-1330	2KM	MPO	DFB+PIN
GZQ4X-C10	40Gbs	QSFP+ LR4	1295-1310	10KM	LC	DFB+PIN
GZQ4X-C30	40Gbs	QSFP+ ER4	1295-1310	30KM	LC	DFB+PIN
GZQ4X-C40	40Gbs	QSFP+ ER4	1295-1310	40KM	LC	DFB+PIN

Solution 1

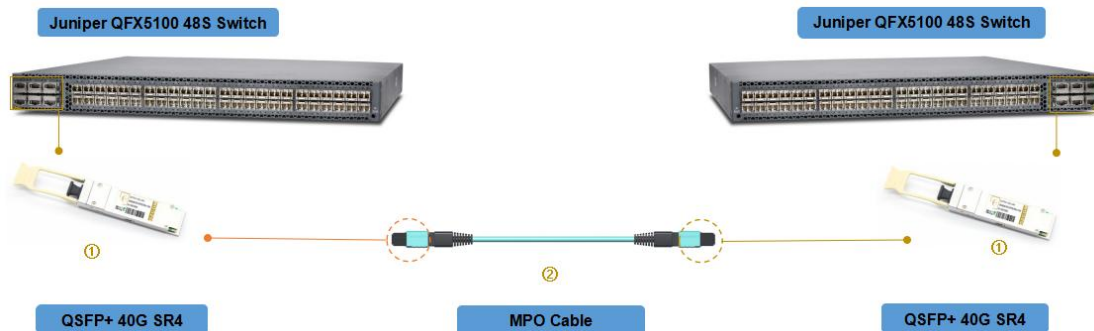


Item No.	GZCOM PN	Description
①	GZQ4X-C01	40G QSFP+ 100M SR4 850nm MPO
②	Patch Cord	2M MPO Female to Female 12 Fibers OM3 Type B

PRODUCT CATALOG




25G SFP28 Transceiver

	<p>Features</p> <ul style="list-style-type: none"> ❖ Hot-pluggable SFP28 form factor ❖ Support 25Gbps data rate ❖ Electrically hot-pluggable ❖ Internal CDR on both Transmitter and Receiver channel ❖ Case operating temperature range:0°C to 70°C ❖ RoHS Compliant
---	---

Ordering Information

PN No.	Data Rates	Package	Wavelength(nm)	Reach	Interface	Source
GZS2X-C01	25Gbs	SFP28 SR	850	100M	MPO	VCSEL+PIN
GZS2X-C10	25Gbs	SFP28 LR	1310	10KM	LC	DFB+PIN
GZS2X-C40	25Gbs	SFP28 ER	1310	40KM	LC	EML+PIN
GZSCxx2X-C10	25Gbs	SFP28 CWDM	1270-	10KM	LC	DFB+PIN
GZSDxx2X-C10	25Gbs	SFP28 DWDM	C17-C60	10KM	LC	EML+PIN
GZSxx2X-C10	25Gbs	SFP28 BIDI	1270/1330	10KM	LC	DFB+PIN
GZSxx2X-C20	25Gbs	SFP28 BIDI	1270/1330	20KM	LC	DFB+PIN

Solution 1

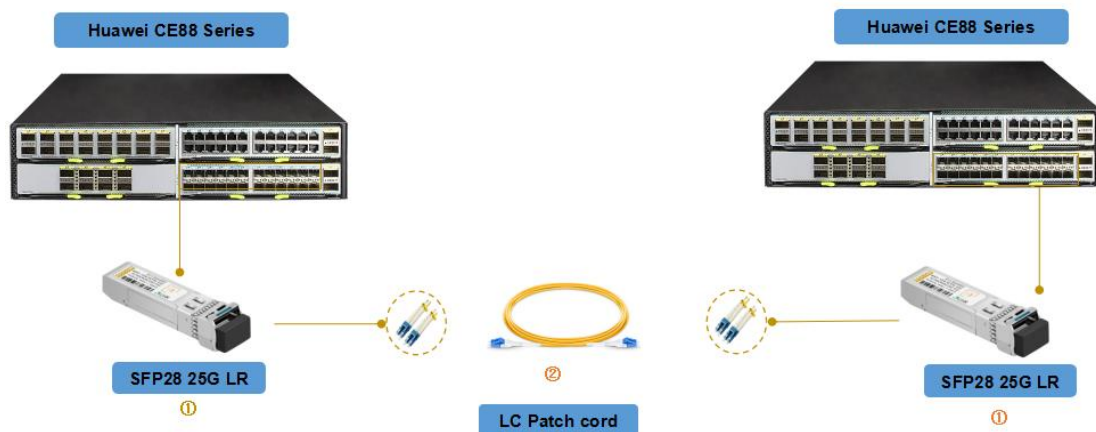


PRODUCT CATALOG



Item No.	GZCOM PN	Description
①	GZS2X-C10	25G SFP25 10KM LR 1310nm LC
②	Patch Cord	Patch Cord LC/UPC-LC/UPC Duplex 2.00mm LSZH OS2 G657

10G SFP+ Transceiver

	<p>Features</p> <ul style="list-style-type: none"> ❖ Up to 9.95Gbps to 10.5Gbps ❖ Single +3.3V power supply ❖ Hot-pluggable ❖ International Class1 laser safety certified ❖ Case operating temperature range:0°C to 70°C ❖ RoHS Compliant
---	--

Ordering Information


PN No.	Data Rates	Package	Wavelength(nm)	Reach	Interface	Source
GZSX-C01	10Gbs	SFP+ SR	850	300M	LC	VCSEL+PIN
GZSX-C2	10Gbs	SFP+ LRM	1310	2KM	LC	FP+PIN
GZSX-C10	10Gbs	SFP+ LR	1310	10KM	LC	DFB+PIN
GZSX-C40	10Gbs	SFP+ ER	1310	40KM	LC	DFB+PIN
GZSX-C40	10Gbs	SFP+ ER	1550	40KM	LC	EML+PIN
GZSX-C80	10Gbs	SFP+ ZR	1550	80KM	LC	EML+PIN
GZSxxX-C10	10Gbs	SFP+ BIDI	1270/1330	10KM	LC	DFB+PIN
GZSxxX-C40	10Gbs	SFP+ BIDI	1270/1330	40KM	LC	DFB+PIN
GZSxxX-C60	10Gbs	SFP+ BIDI	1270/1330	60KM	LC	DFB+APD
GZSxxX-C80	10Gbs	SFP+ BIDI	1490/1550	80KM	LC	EML+APD
GZSCxxX-C20	10Gbs	SFP+ CWDM	1270-1610	20KM	LC	DFB+PIN
GZSCxxX-C40	10Gbs	SFP+ CWDM	1470-1610	40KM	LC	EML+PIN
GZSCxxX-C80	10Gbs	SFP+ CWDM	1470-1610	80KM	LC	EML+APD
GZSDxxX-C40	10Gbs	SFP+ DWDM	DWDM	40KM	LC	EML+PIN

PRODUCT CATALOG



GZSDxxX-C80	10Gbs	SFP+ DWDM	DWDM	80KM	LC	EML+APD
-------------	-------	--------------	------	------	----	---------

Solution 1

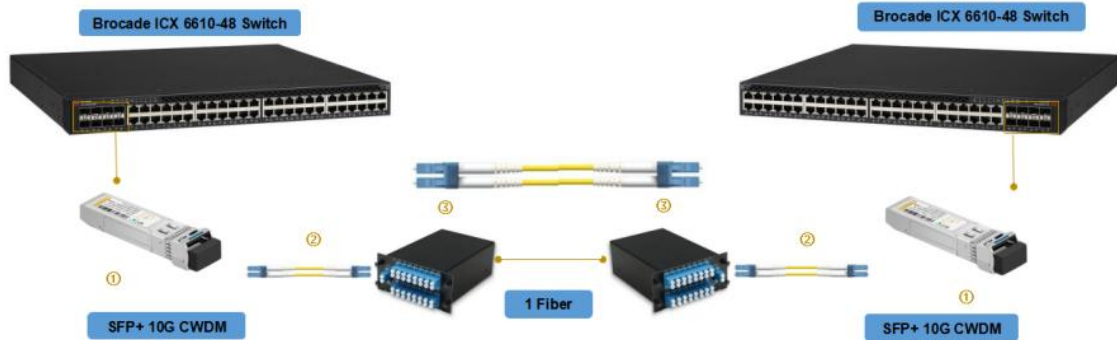

Item No.	GZCOM PN	Description
①	GZSCxxX-C40	10G SFP+ CWDM 20KM
②	Patch Cord	2M LC/UPC-LC/UPC Patch Cord OS2
③	Mux/Demux	16 Channels 1470-1610nm Dual Fiber CWDM Mux/Demux

1.25G SFP Transceiver



Features

- ❖ Data-rate of 1.25Gbps operation
- ❖ Single +3.3V power supply
- ❖ Hot-pluggable
- ❖ International Class1 laser safety certified
- ❖ Case operating temperature range:0°C to 70°C
- ❖ RoHS Compliant

Ordering Information


PN No.	Data Rates	Package	Wavelength(nm)	Reach	Interface	Source
GZS12-C05	1.25Gbs	SFP SX	850	550M	LC	VCSEL+PIN
GZS12-C2-SM	1.25Gbs	SFP	1310 Single mode	2KM	LC	FP+PIN
GZS12-C2-MM	1.25Gbs	SFP	1310 Multi mode	2KM	LC	FP+PIN
GZS12-C10	1.25Gbs	SFP LX	1310	10KM	LC	DFB+PIN
GZS12-C40	1.25Gbs	SFP EX	1310	40KM	LC	DFB+PIN

PRODUCT CATALOG



GZS12-C40	1.25Gbs	SFP EX	1550	40K M	LC	EML+PIN
GZS12-C80	1.25Gbs	SFP ZX	1550	80K M	LC	EML+PIN
GZSxx12-C10	1.25Gbs	SFP BIDI	1270/1330	10K M	LC	DFB+PIN
GZSxx12-C40	1.25Gbs	SFP BIDI	1270/1330	40K M	LC	DFB+PIN
GZSxx12-C60	1.25Gbs	SFP BIDI	1270/1330	60K M	LC	DFB+APD
GZSxx12-C80	1.25Gbs	SFP BIDI	1490/1550	80K M	LC	EML+APD
GZSCxx12-C20	1.25Gbs	SFP CWDM	1270-1610	20K M	LC	DFB+PIN
GZSCxx12-C40	1.25Gbs	SFP CWDM	1470-1610	40K M	LC	EML+PIN
GZSCxx12-C80	1.25Gbs	SFP CWDM	1470-1610	80K M	LC	EML+APD
GZSDxx12-C40	1.25Gbs	SFP DWDM	DWDM	40K M	LC	EML+PIN
GZSDxx12-C80	1.25Gbs	SFP DWDM	DWDM	80K M	LC	EML+APD
GZSDxx12-C100	1.25Gbs	SFP DWDM	DWDM	100K M	LC	EML+APD

SFP/SFP+ Copper-T Transceiver

	<p>Features</p> <ul style="list-style-type: none"> ❖ Support 10Gbase-T / 5Gbase-T / 2.5Gbase-T / 1000base-T Single ❖ +3.3V power supply ❖ International Class1 laser safety certified ❖ Compact RJ-45 connector assembly ❖ Case operating temperature range: 0°C to 70°C ❖ RoHS Compliant
---	--

Ordering Information


PN No.	Data Rates	Package	Wavelength(nm)	Reach	Interface	Source
GZ-T1	1.25Gbs	SFP RJ45	/	100M	RJ45	/
GZ-T2	1.25Gbs	SFP RJ45	/	100M	RJ45	/
GZ-T3	1.25Gbs	SFP RJ45	/	100M	RJ45	/
GZ-T4	1.25Gbs	SFP RJ45	/	100M	RJ45	/

PRODUCT CATALOG




GZ-T5	10Gbs	SFP+ RJ45	/	30M	RJ45	/
-------	-------	-----------	---	-----	------	---

Solution 1

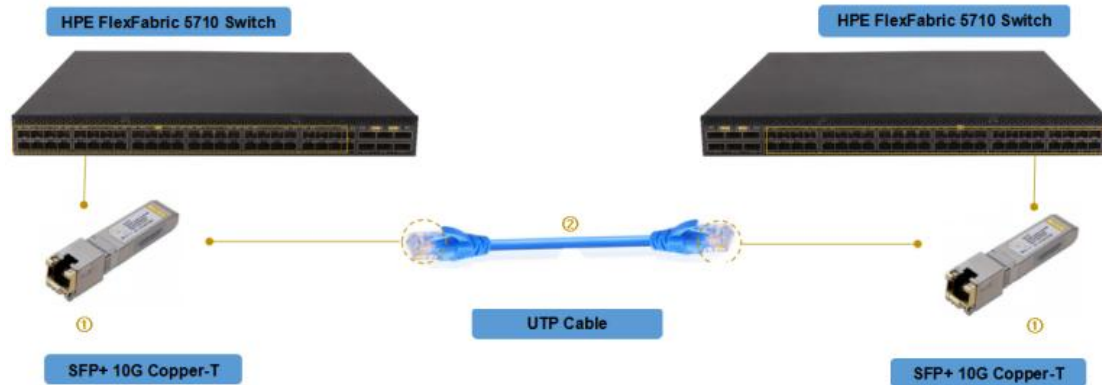

Item No.	GZCOM PN	Description
①	GZ-T5	10G SFP+ 30M Copper-T RJ-45
②	Cat6 Cable	Cat6 UTP Cable

100G QSFP28 DAC Cable

	<p>Features</p> <ul style="list-style-type: none"> ❖ QSFP28 conforms to the Small Form Factor SFF8665 ❖ 4-Channel Full-Duplex Passive Copper ❖ Support data rates : 25.78Gb/s (per channel) ❖ Maximum aggregate data rate: 100Gb/s (4 x 25.78Gb/s) ❖ Copper link x (x=1m,3m,5m) ❖ RoHS Compliant
---	---

Ordering Information

PN No.	Data Rates	Package	Reach	Cable Material	Temperature
GZQ10X-DAC-1	100Gbs	QSFP28 to QSFP28	1M	PVC	0~70°C
GZQ10X-DAC-3	100Gbs	QSFP28 to QSFP28	3M	PVC	0~70°C
GZQ10X-DAC-5	100Gbs	QSFP28 to QSFP28	5M	PVC	0~70°C


Solution 1

Item No.	GZCOM PN	Description
①	GZQ10X-DAC-1	100G QSFP28 to 100G QSFP28 Direct Attach Passive Copper Cables 1M

PRODUCT CATALOG



100G QSFP28 TO 4x25G SFP28 DAC Cable

	<p>Features</p> <ul style="list-style-type: none"> ❖ QSFP28 conforms to the Small Form Factor SFF8665 ❖ 4-Channel Full-Duplex Passive Copper ❖ Support data rates : 25.78Gb/s (per channel) ❖ Maximum aggregate data rate: 100Gb/s (4 x 25.78Gb/s) ❖ Copper link x (x=1m,3m,5m, 7m) ❖ RoHS Compliant
---	---

Ordering Information

PN No.	Data Rates	Package	Reach	Cable Material	Temperature
GZQ10X-4-DAC -1	100Gbs	QSFP28 to 4XSFP28	1M	PVC	0~70℃
GZQ10X-4-DAC -3	100Gbs	QSFP28 to 4XSFP28	3M	PVC	0~70℃
GZQ10X-4-DAC -5	100Gbs	QSFP28 to 4XSFP28	5M	PVC	0~70℃

Solution

1




Item No.	GZCOM PN	Description
----------	----------	-------------

PRODUCT CATALOG




①	GZQ10X-4-DAC -1	100G QSFP28 to 4x25G SFP28 DAC Cable 2m
---	--------------------	---

40G QSFP+ DAC Cable

	<p>Features</p> <ul style="list-style-type: none"> ❖ Maximum aggregate data rate: 41.25 Gbps (4 x10.3125Gbit/s) ❖ Hybrid cable conforms to the Small Form Factor SFF-8436 ❖ Temperature Range: 0~ 70°C ❖ Power Supply :+3.3V ❖ Copper link length up to x (x=0.5~7m) ❖ RoHS Compliant
---	--


Ordering Information

PN No.	Data Rates	Package	Reach	Cable Material	Temperature
GZQ4X-DAC-1	40Gbs	QSFP+ to QSFP+	1M	PVC	0~70°C
GZQ4X-DAC-3	40Gbs	QSFP+ to QSFP+	3M	PVC	0~70°C
GZQ4X-DAC-5	40Gbs	QSFP+ to QSFP+	5M	PVC	0~70°C
GZQ4X-DAC-7	40Gbs	QSFP+ to QSFP+	7M	PVC	0~70°C

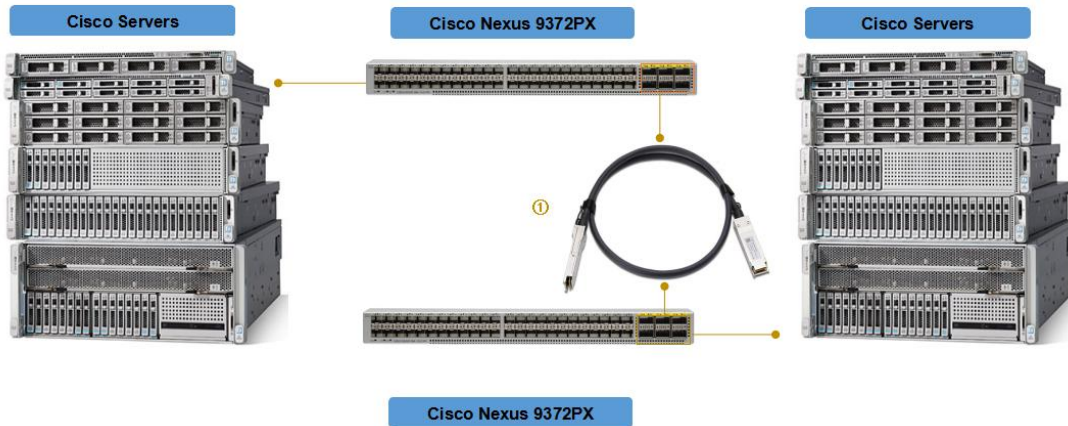

Item No.	GZCOM PN	Description
①	GZQ4X-DAC-1	40G QSFP+ to 40G QSFP+ Direct Attach Passive Copper Cables 1M


40G QSFP+ To 4x10G SFP+ DAC Cable

	<p>Features</p> <ul style="list-style-type: none"> ❖ High-Density QSFP 38-PIN and 4×SFP 20-PIN Connector ❖ Hybrid cable conforms to the Small Form Factor SFF-8436 and SFF-8431 ❖ Maximum aggregate data rate: 41.25Gbps (4 ×10.3125Gbit/s) ❖ Maximum aggregate data rate: 100Gb/s (4 x 25.78Gb/s) ❖ Copper link x (x=1m,3m,5m, 7m) ❖ RoHS Compliant
---	---

Ordering Information

PN No.	Data Rates	Package	Reach	Cable Material	Temperature
GZQ4X-4-DAC-1	40Gbs	QSFP+ to 4XSFP+	1M	PVC	0~70℃
GZQ4X-4-DAC-3	40Gbs	QSFP+ to 4XSFP+	3M	PVC	0~70℃
GZQ4X-4-DAC-5	40Gbs	QSFP+ to 4XSFP+	5M	PVC	0~70℃
GZQ4X-4-DAC-7	40Gbs	QSFP+ to 4XSFP+	7M	PVC	0~70℃

Solution 1

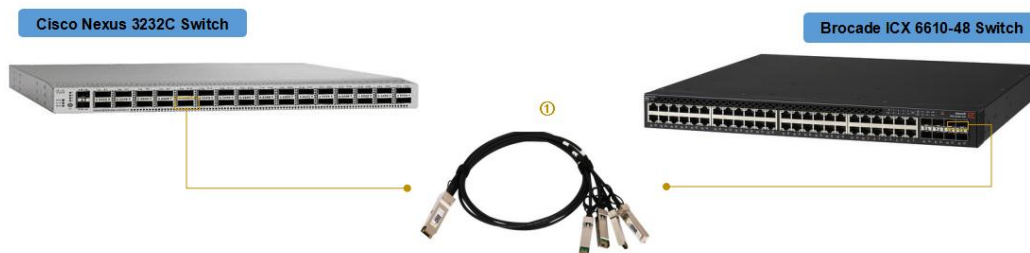


Item No.	GZCOM PN	Description
①	GZQ4X-4-DAC-1	40G QSFP+ to 4x10G SFP+ DAC Cable 2m

PRODUCT CATALOG



25G SFP28 DAC Cable

	<p>Features</p> <ul style="list-style-type: none"> ❖ Up to 25Gb/s data rate SFF-8402 Compliant ❖ Single 3.3V supply voltage ❖ Operating case temperature of 0-70 °C ❖ Compliant with SFF-8432. ❖ Copper link x (x=1m,3m,5m, 7m) ❖ RoHS Compliant
---	---

Ordering Information

PN No.	Data Rates	Package	Reach	Cable Material	Temperature
GZS2X-DAC-1	25Gbs	SFP28 to SFP28	1M	PVC	0~70°C
GZS2X-DAC-3	25Gbs	SFP28 to SFP28	3M	PVC	0~70°C
GZS2X-DAC-5	25Gbs	SFP28 to SFP28	5M	PVC	0~70°C
GZS2X-DAC-7	25Gbs	SFP28 to SFP28	7M	PVC	0~70°C

Solution 1




Item No.	GZCOM PN	Description
①	GZQ2X-DAC-1	25G SFP28 to SFP28 DAC Cable 1m

10G SFP+ DAC Cable

PRODUCT CATALOG



	<p>Features</p> <ul style="list-style-type: none"> ❖ Support for multi-gigabit data rates up to 10Gb/s ❖ Data rates backward compatible to 1 Gb/s ❖ Operating case temperature of 0-70 °C ❖ Hot-pluggable SFP 20PIN footprint ❖ Copper link x (x=1m,3m,5m, 7m...15m) ❖ RoHS Compliant
---	--

Ordering Information


PN No.	Data Rates	Package	Reach	Cable Material	Temperature
GZSX-DAC-1	10Gbs	SFP+ to SFP+	1M	PVC	0~70°C
GZSX-DAC-3	10Gbs	SFP+ to SFP+	3M	PVC	0~70°C
GZSX-DAC-5	10Gbs	SFP+ to SFP+	5M	PVC	0~70°C
GZSX-DAC-7	10Gbs	SFP+ to SFP+	7M	PVC	0~70°C

Solution 1



Item No.	GZCOM PN	Description
①	GZQX-DAC-1	10G SFP+ to SFP+ DAC Cable 1m

100G QSFP28 AOC Cable

	<p>Features</p> <ul style="list-style-type: none"> ❖ Four-channel full-duplex active optical cable ❖ Transmission data rate up to 26Gbit/s per channel ❖ Reliable VCSEL array technology using multimode fiber ❖ Temperature Range: 0~ 70°C ❖ Power Supply :+3.3V ❖ Available in standard lengths of 3, 5, 10, 15, 20, 30, 50,70m ❖ RoHS Compliant
---	--


Ordering Information

PRODUCT CATALOG




PN No.	Data Rates	Package	Reach	Tx	Cable Type
GZQ10X-AOC-1	100Gbs	QSFP28 to QSFP28	1M	850nm VCSEL	OM3
GZQ10X-AOC-3	100Gbs	QSFP28 to QSFP28	3M	850nm VCSEL	OM3
GZQ10X-AOC-5	100Gbs	QSFP28 to QSFP28	5M	850nm VCSEL	OM3

Solution 1

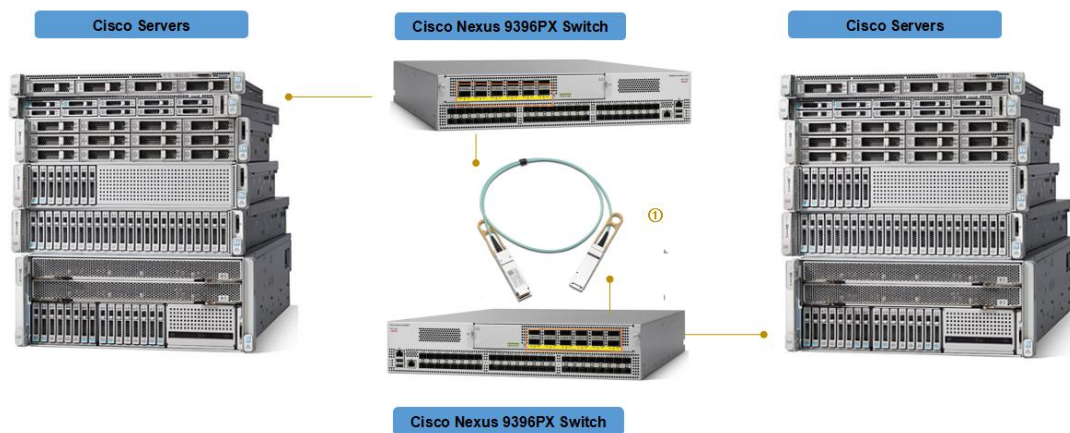

Item No.	GZCOM PN	Description
①	GZQ10X-AOC-1	100G QSFP28 to QSFP28 AOC Cable 1m

100G QSFP28 To 4X25G SFP28 AOC Cable

	<p>Features</p> <ul style="list-style-type: none"> ❖ Electrical interface compliant to SFF-8436 and SFF-8431 ❖ 850nm VCSEL laser and PIN photo-detector ❖ Digital diagnostics functions are available via the I2C interface ❖ Temperature Range: 0~ 70°C ❖ Power Supply :+3.3V ❖ Available in standard lengths of 3, 5, 10, 15, 20, 30, 50,70m ❖ RoHS Compliant
---	---

Ordering Information


PN No.	Data Rates	Package	Reach	Tx	Cable Type
GZQ10X-4-AOC	100Gbs	QSFP28 to 4XSFP28	1M	850nm VCSEL	OM3

PRODUCT CATALOG



-1					
GZQ10X-4-AOC -3	100Gbs	QSFP28 to 4XSFP28	3M	850nm VCSEL	OM3
GZQ10X-4-AOC -5	100Gbs	QSFP28 to 4XSFP28	5M	850nm VCSEL	OM3

Solution 1

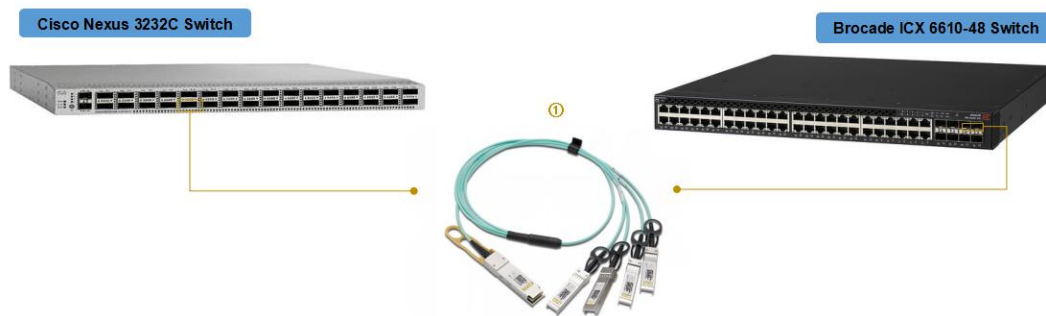

Item No.	GZCOM PN	Description
①	GZQ10X-4-AOC -1	100G QSFP28 to 4XSFP28 AOC Cable 1m

40G QSFP+ To QSFP+ AOC Cable


	<p>Features</p> <ul style="list-style-type: none"> ❖ Four-channel full-duplex active optical cable ❖ Transmission data rate up to 11.3Gbit/s per channel ❖ Reliable VCSEL array technology using multimode fiber ❖ Temperature Range: 0~ 70°C ❖ Power Supply :+3.3V ❖ Available in standard lengths of 3, 5, 10, 15, 20, 30, 50,70m ❖ RoHS Compliant
--	--

Ordering Information

PN No.	Data Rates	Package	Reach	Tx	Cable Type
GZQ4X-AOC-1	40Gbs	QSFP+ to QSFP+	1M	850nm VCSEL	OM3
GZQ4X-AOC-3	40Gbs	QSFP+ to QSFP+	3M	850nm VCSEL	OM3
GZQ4X-AOC-5	40Gbs	QSFP+ to QSFP+	5M	850nm VCSEL	OM3

Solution1

PRODUCT CATALOG

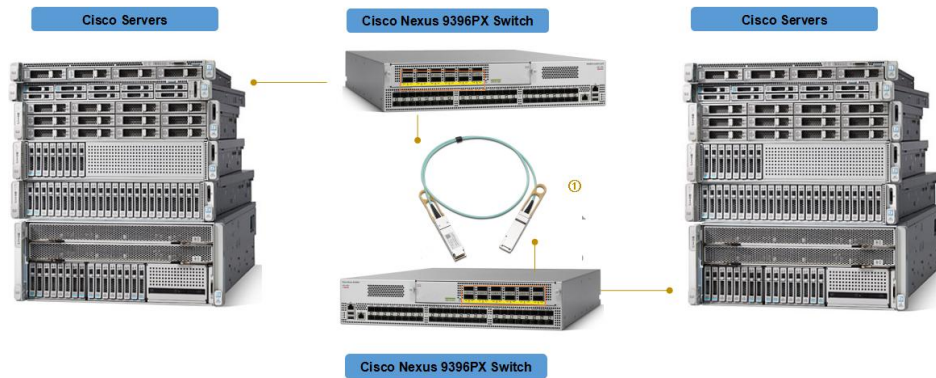

Item No.	GZCOM PN	Description
①	GZQ4X-AOC-1	40G QSFP+ to QSFP+ AOC Cable 1m

40G QSFP+ To 4X10G SFP+ AOC Cable


	<p>Features</p> <ul style="list-style-type: none"> ❖ Compliant to the 40GBASE-SR4 and XLPP1 ❖ Specification per IEEE 802.3ba-2010 and supporting ❖ 40G-IB-QDR / 20G-IB-DDR / 10G-IB-SDR applications ❖ Compliant to the industry standard SFF-8436 ❖ QSFP+ Specification ❖ Temperature Range: 0~ 70°C ❖ Power Supply :+3.3V ❖ Available in standard lengths of 3, 5, 10, 15, 20, 30, 50,70m ❖ RoHS Compliant
--	--

Ordering Information

PN No.	Data Rates	Package	Reach	Tx	Cable Type
GZQ4X-4-AOC-1	40Gbs	QSFP+ to 4XSFP+	1M	850nm VCSEL	OM3
GZQ4X-4-AOC-3	40Gbs	QSFP+ to 4XSFP+	3M	850nm VCSEL	OM3
GZQ4X-4-AOC-5	40Gbs	QSFP+ to 4XSFP+	5M	850nm VCSEL	OM3

Solution 1

PRODUCT CATALOG

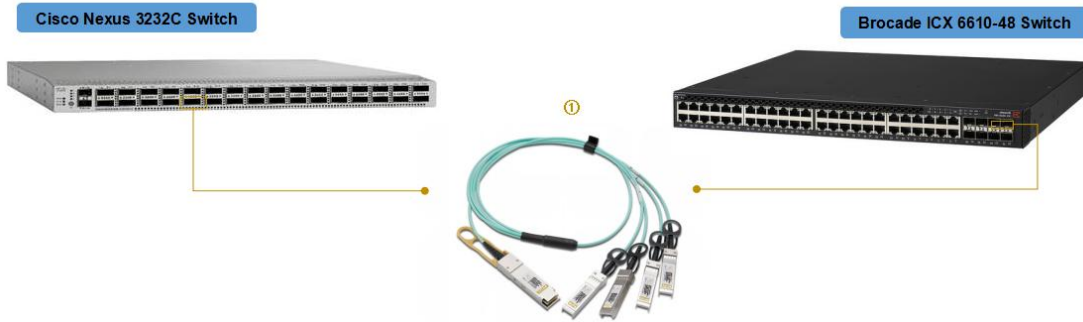

Item No.	GZCOM PN	Description
①	GZQ4X-4-AOC-1	40G QSFP+ to 4XSFP+ AOC Cable 1m

25G SFP28 To SFP28 AOC Cable

	<p>Features</p> <ul style="list-style-type: none"> ❖ Electrical interface compliant to SFF-8431 ❖ 850nm VCSEL laser and PIN photo-detector ❖ Maximum link length of 70m on OM3 MMF and 100m on OM4 MMF ❖ Digital diagnostics functions ❖ Temperature Range: 0~ 70°C ❖ Power Supply :+3.3V ❖ Hot Pluggable ❖ RoHS Compliant
--	---

Ordering Information

PN No.	Data Rates	Package	Reach	Tx	Cable Type
GZS2X-AOC-1	25Gbs	SFP28 to SFP28	1M	850nm VCSEL	OM3
GZS2X-AOC-3	25Gbs	SFP28 to SFP28	3M	850nm VCSEL	OM3
GZS2X-AOC-5	25Gbs	SFP28 to SFP28	5M	850nm VCSEL	OM3

Solution 1




PRODUCT CATALOG



Item No.	GZCOM PN	Description
①	GZS2X-AOC-1	25G SFP28 to SFP28 AOC Cable 1m

10G SFP+ To SFP+ AOC Cable

	<p>Features</p> <ul style="list-style-type: none"> ❖ Electrical interface compliant to SFF-8431 ❖ 850nm VCSEL laser and PIN photo-detector ❖ Maximum link length of 70m on OM3 MMF and 100m on OM4 MMF ❖ Digital diagnostics functions ❖ Temperature Range: 0~ 70°C ❖ Power Supply :+3.3V ❖ Hot Pluggable ❖ RoHS Compliant
---	---

Ordering Information

PN No.	Data Rates	Package	Reach	Tx	Cable Type
GZSX-AOC-1	10Gbs	SFP+ to SFP+	1M	850nm VCSEL	OM3
GZSX-AOC-3	10Gbs	SFP+ to SFP+	3M	850nm VCSEL	OM3
GZSX-AOC-5	10Gbs	SFP+ to SFP+	5M	850nm VCSEL	OM3

Solution 1



Item No.	GZCOM PN	Description
①	GZSX-AOC-1	10G SFP+ to SFP+ AOC Cable 1m

Media Converter



Features

- ❖ Data Rate: 10/100Mbps, 1000Mbps, 10/100/1000Mbps

PRODUCT CATALOG



- ❖ Fiber Type: 550M/2KM for Multimode; 20/40/60/80/120KM for Single mode
- ❖ Optic Connector: SC(default)/ST/FC/LC, SFP
- ❖ Supports AC110V/220V and DC48V

Ordering Information

Media Converter	
PN.	Description
10/100Mbps Dual Fiber	
GZM-100-2	10/100M Dual Fiber MM Media Converter, 1310nm,2KM SC Connector
GZM-100-20	10/100M Dual Fiber SM Media Converter, 1310nm, 20KM SC Connector
GZM-100-20	10/100M Dual Fiber SM Media Converter, 1310nm,40KM SC Connector
GZM-100-40	10/100M Dual Fiber SM Media Converter, 1550nm,60KM SC Connector
GZM-100-80	10/100M Dual Fiber SM Media Converter, 1550nm,80KM SC Connector
10/100Mbps Single Fiber	
GZM-100-20A	10/100M Single Fiber SM Media Converter, 1310/1550nm,20KM SC Connector
GZM-100-20B	10/100M Single Fiber SM Media Converter, 1550/1310nm,20KM SC Connector
GZM-100-40A	10/100M Single Fiber SM Media Converter, 1310/1550nm,40KM SC Connector
GZM-100-40B	10/100M Single Fiber SM Media Converter, 1550/1310nm,40KM SC Connector
GZM-100-60A	10/100M Single Fiber SM Media Converter, 1490/1550nm,60KM SC Connector
GZM-100-60B	10/100M Single Fiber SM Media Converter,1550/1490nm,60KM SC Connector
GZM-100-80A	10/100M Single Fiber SM Media Converter, 1490/1550nm,80KM SC Connector
GZM-100-80B	10/100M Single Fiber SM Media Converter, 1550/1490nm,80KM SC Connector
1000Mbps Dual Fiber	
GZM-1000-05	1000M Dual Fiber MM Media Converter, 850nm 550M SC Connector
GZM-1000-20	1000M Dual Fiber SM Media Converter, 1310nm,20KM SC Connector
GZM-1000-40	1000M Dual Fiber SM Media Converter, 1310nm,40KM SC Connector
GZM-1000-80	1000M Dual Fiber SM Media Converter, 1550nm,80KM SC Connector
1000Mbps Single Fiber	
GZM-1000-20A	1000M Single Fiber SM Media Converter, 1310/1550nm,20KM SC Connector
GZM-1000-20B	1000M Single Fiber SM Media Converter, 1550/1310nm,20KM SC Connector
10/100/1000Mbps Dual Fiber	
GZM-1100-05	10/100/1000M Dual Fiber MM Media Converter,850nm,550M SC Connector
GZM-1100-2	10/100/1000M Dual Fiber MM Media Converter,1310nm,2KM SC Connector
GZM-1100-20	10/100/1000M Dual Fiber SM Media Converter, 1310nm,20KM SC Connector
GZM-1100-40	10/100/1000M Dual Fiber SM Media Converter,1310nm,40KM SC Connector
GZM-1100-60	10/100/1000M Dual Fiber SM Media Converter,1550nm,60KM SC Connector
GZM-1100-80	10/100/1000M Dual Fiber SM Media Converter,1550nm,80KM SC Connector
10/100/1000Mbps Single Fiber	

PRODUCT CATALOG



GZM-1100-20A	10/100/1000M Single Fiber SM Media Converter, 1310/1550nm,20KM SC
GZM-1100-20B	10/100/1000M Single Fiber SM Media Converter, 1550/1310nm,20KM SC
GZM-1100-40A	10/100/1000MM Single Fiber SM Media Converter, 1310/1550nm,40KM SC
GZM-1100-40B	10/100/1000M Single Fiber SM Media Converter, 1550/1310nm,40KM SC
GZM-1100-60A	10/100/1000M Single Fiber SM Media Converter, 490/1550nm,60KM SC
GZM-1100-60B	10/100/1000M Single Fiber SM Media Converter,1550/1490nm,60KM SC
Media Converter SFP/SFP+ slot	
GZM-M-SFP	10/100Mbps SFP Media Converter without SFP Module
GZM-G-SFP	10/100/1000Mbps SFP Media Converter without SFP Module
GZM-X-SFP	10G SFP+ Media converter without SFP Module

Solution 1



Item No.	GZCOM PN	Description
①	GZM-M-SFP	10/100/1000Mbps SFP Media Converter without SFP Module
②	Media Converter Chassis	Media Converter Chassis 12 slots

PRODUCT CATALOG



CERTIFICATE



Widely Compatible

WIDELY COMPATIBLE
