



Description

GZMI-1000-2F4P1C is an hardened 6-port Industrial PoE Switch, provides non-blocking wire-speed performance in harsh industrial environment. It also provides 4-port 10/100/1000BASE-TX RJ45 PoE +2G SFP delivered in an IP40 rugged, strong case with redundant power system. Its slim case is suitable for such applications as surveillance system deployments, control management and wireless service in climatically demanding environments with wide temperature range from -40°C to 85°C.

GZMI-1000-2F4P1C provides the flexibility to all kinds of 10/100/1000Mbps Ethernet Media on RJ-45 port and performs highly stable fiber performance.

GZMI-1000-2F4P1C is packaged in a compact IP40 case that allows either DIN rail or panel mounting to have efficient usage of cabinet space. It provides an integrated power supply with a wide range of voltages for worldwide operation. It also offers dual-redundant, reversible polarity 48V DC to 57V DC power supply inputs for high availability applications requiring dual or backup power inputs.

Features

- ❖ 4-port 10/100/1000Base-Tx RJ-45 with auto negotiation and auto-MDI/ MDI-X function, supplying 30W PoE, compatible with 802.3AT/AF
- ❖ 2G SFP
- ❖ 48V to 57V DC, redundant power input
- ❖ -40°C to 85°C operating temperature
- ❖ IP40 aluminum housing
- ❖ Supports 6KV DC Ethernet ESD protection
- ❖ Supports 6KV DC EFT protection for power line
- ❖ Free Fall, Shock and Vibration Stability
- ❖ DIN-rail design
- ❖ Support STP/RSTP/MSTP
- ❖ Web management, CLI
- ❖ IGMP snooping, QOS, VLAN, SNMP

Specification


Model No.	GZMI-1000-2F4P1C
10/100/1000Base-TX Port	4-Port RJ-45 auto-MDI / MDI-X
PoE Specification	PoE Standard: IEEE802.3af/ IEEE802.3at
	PoE ports:1-4 port support PoE
	Power Output: Max. 15.4 watts (IEEE 802.3af) Max. 30 watts (IEEE 802.3at)
	PoE port Auto detect AF/AT devices
	Output Voltage: DC48V
	Power Pin Assignment:1/2+;3/6-
	Power Type: End-span(Mid-span optional)
1000Base-FX Port	2G SFP Slot
Performance Specification	Bandwidth (switch capacity): 38Gbps Packet Buffer Memory: 12Mbit Packet Forwarding Rate: 28.3Mpps MAC Address Table: 8K
Installation	DIN rail
Maximum Frame Size	10240bytes
Flow Control	Back pressure for half duplex, IEEE 802.3x pause frame for full duplex
Enclosure	IP40 aluminum housing
LED Indicator	Power: Red
	Fiber: Link 2(Green)
	Ethernet: Yellow
Power Input	48 to 57V DC redundant power
Power Consumption	< 10W
Surge protection	± 4KV

Shenzhen GZCOM Communication Co., Ltd.

Email: sales@gzcomm.com
<https://www.gzcomm.com>

Network Protocols	IEEE802.3 10BASE-T; IEEE802.3i 10Base-T; IEEE802.3u;100Base-TX/FX; IEEE802.3ab 1000Base-T; IEEE802.3z 1000Base-X; IEEE802.3x;
Network cables	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤10meter) 1000BASE-TX: Cat6 or later UTP(≤100 meter)
Industry Standard	FCC CFR47 Part 15,EN55022/CISPR22, Class A IEC61000-4-2 (ESD): ±8kV (contact), ±12kV (air) IEC61000-4-3 (RS): 10V/m (80~1000MHz) IEC61000-4-4 (EFT): Power Port: ±4kV; Data Port: ±2kV IEC61000-4-5 (Surge): Power Port: ±2kV/DM, ±4kV/CM; Data Port: ±2kV IEC61000-4-6 (CS): 3V (10kHz-150kHz); 10V (150kHz-80MHz) IEC61000-4-16 (Common mode conduction): 30V (cont.), 300V (1s)
Certification	CE FCC Rohs compliance
MTBF	>300,000hours
Dimensions (W x D x H)	143.7 x 103 x 44.2 mm
Weight	Product Weight: 0.36KG Packing Weight: 0.46KG
Working Environment	Working temperature: -40~85℃ ; Storage temperature: -40~85℃ Relative Humidity: 5%~95 % (no condensation)
Warranty	1-year replacement with new item; 3-years for main parts.

Dimensions

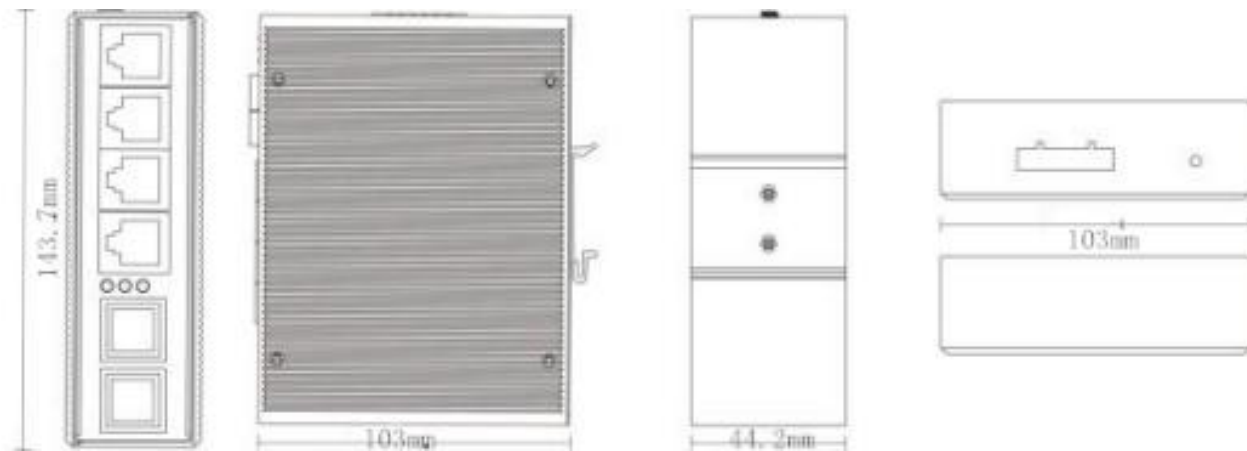

GZCOM reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by Shenzhen GZ Communication Co., Ltd.

Copyright ©GZCOM

All Rights Reserved